
# Continental

### Refrigerator

## 60" SANDWICH UNIT REFRIGERATORS

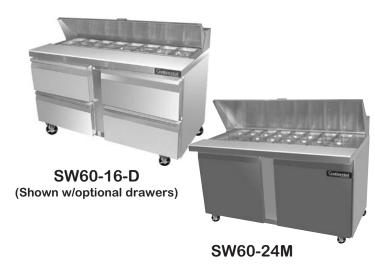

#### **Standard Features**

- Unique Air Flow Distribution Allows Pan Product to Maintain 33°–41°F Being in Compliance with and Certified Under the '98 NSF Standard For Preparation Units.
- · Modern, State-of-the-Art Styling
- Performance Rated Refrigeration System Utilizing Environmentally Safe R-134a Refrigerant
- Easily Serviceable Back Mounted Compressor
- 2" Non-CFC Polyurethane Foam Insulation
- · Spring Loaded, Self Closing Door
- · Magnetic Snap-In Gasket
- 5" Casters, two with brakes, two without brakes
- · Heavy-Duty, Epoxy-Coated Steel Shelves
- Interior Hanging Thermometer
- · Full Length Nylon Cutting Board
- Cabinet Construction Consisting of Stainless Steel Front and Top, Aluminum End Panels, Case Back and Interior
- · Non-Corrosive, Plasticized Fin Evaporator Coil
- Completely Enclosed, Vented and Removable Case Back
- Automatic, Energy Saving, Non-Electric Condensate Disposal
- 1/6 Size Pans, 4" Deep
- · 10 ft Cord and Plug Attached

#### **Models Available**

- SW60-8 SW60-8C SW60-12M
- SW60-12 SW60-12C SW60-18M
- SW60-16 SW60-16C SW60-24M

Utilizing Environmentally Safe, CFC-free R-134a Refrigerant



#### **Optional Features & Accessories**

- Legs
- Remote Models R
- Stainless Steel End Panels-SA Models
- Stainless Steel Interior & Exterior-SS Models
- Stainless Steel Finished Back in Lieu of Aluminum
- Stainless Steel Roll Out Drawers in Lieu of Doors-D Models

- · Electric Condensate
- Pan Opening Sizes
- Stainless Steel Legs
- · Additional Shelves
- Door Locks
- · Single Overshelf
- · Double Overself

#### **60" SANDWICH UNIT REFRIGERATORS**

SPECIFICATIONS	SW60-8	SW60-12	SW60-16	SW60-8C	SW60-12C	SW60-16C	SW60-12M	SW60-18M	SW60-24M
DIMENSIONAL DATA									
Net Capacity (cu. ft.)	17.0	17.0	17.0	17.0	17.0	17.0	17.0	17.0	17.0
<sup>1</sup> / <sub>6</sub> Size Pans	8	12	16	8	12	16	12	18	24
Width, Overall (in.)	60	60	60	60	60	60	60	60	60
Depth, (incl. Hdls.& Bumpers) (in.)	31	31	31	31	31	31	31	31	31
Depth, Body Only (Less Door(s)(in.)	$27^{1}/_{2}$	$27^{1}/_{2}$	$27^{1}/_{2}$	$27^{1}/_{2}$	$27^{1}/_{2}$	$27^{1}/_{2}$	$27^{1}/_{2}$	$27^{1}/_{2}$	27 <sup>1</sup> / <sub>2</sub>
Depth, Cutting Board (Std. Top)	12	12	12	19	19	19	10	10	10
Height, Overall (incl. 5" Casters) (in.)	42 <sup>3</sup> / <sub>8</sub>	42 3/8	42 3/8	42 3/8	42 3/8	42 3/8	42 3/8	42 3/8	42 3/8
Shelf Area (sq. ft.)	8.1	8.1	8.1	8.1	8.1	8.1	8.1	8.1	8.1
No. of Shelves	2	2	2	2	2	2	2	2	2
No. of Doors	2	2	2	2	2	2	2	2	2
Condensing Unit Size (H.P.)	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4
Refrigerant	R134a	R134a	R134a	R134a	R134a	R134a	R134a	R-134a	R-134a
Cabinet Electrical	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1
Amps	8.2	8.2	8.2	8.2	8.2	8.2	8.2	8.2	8.2
Fans	3	3	3	3	3	3	3	3	3
Interior Depth (in.)	20	20	20	20	20	20	20	20	20
Interior Height (in.)	261/4	261/4	26 <sup>1</sup> / <sub>4</sub>	26 <sup>1</sup> / <sub>4</sub>	261/4	261/4	261/4	26 <sup>1</sup> / <sub>4</sub>	261/4
Interior Width (in.)	56	56	56	56	56	56	56	56	56
Shipping Weight (lbs.)	309	311	315	315	315	315	319	322	330
Shipping Height (in.)	431/4	431/4	431/4	431/4	431/4	431/4	431/4	431/4	431/4
Shipping Length (in.)	68 <sup>1</sup> / <sub>4</sub>	68 <sup>1</sup> / <sub>4</sub>	68 <sup>1</sup> / <sub>4</sub>	68 <sup>1</sup> / <sub>4</sub>	68 <sup>1</sup> / <sub>4</sub>	68 <sup>1</sup> / <sub>4</sub>	68 <sup>1</sup> / <sub>4</sub>	68 <sup>1</sup> / <sub>4</sub>	68 <sup>1</sup> / <sub>4</sub>
Shipping Depth (in.)	46	46	46	46	46	46	46	46	46
FRONT VIEW	7 27/32	3 3/8 23 3/8 23 3/8 14 7/8 23 3/9 0 0 PEX	OR 35 7/8	DOOR OPENING	35 19 3/8 11 19 1/4 11 10 1/4 10	7 7	-	M -Top Side View	
30° 30° 30° 12° 12° 12° 12° 12° 12° 12° 12° 12° 12	60"	30" 12"	60		34	60 31 3/4	34	60	12-+  12-+
	/60-12				<u> </u>	C\\/40 10\\	19	CMCO	
31100-0	100-12		SW60-	16	T 3 1/4	SW48-12M	Î Î 3 1/4	SW60	-00
34 31/4 SW60-12C S	31 3/4	• 10	34	60	12	34	sW60-24	0 10	
34400-120	W60-16C	Ť		SW60-18N	'i		3 7 7 0 0 - 22	TIVI	

